



CISCO AP SUSPENDED CEILING TILE ENCLOSURE MOUNT (4800 STYLE)



The AccelTex Solutions Cisco AP suspended ceiling tile enclosure mount secures and protects a Cisco 4800 within a ceiling tile grid. This enclosure mount fits in a standard 2'x2' suspended ceiling tile grid opening and is the most convenient and secure method for AP mounting in a suspended ceiling environment.

Part Number: ATS-CT-CISCO4-2X2




FEATURES

- Door is easily removed and can be installed to open in any direction with our innovative spring hinge system
- AP installs using the integrated mounting plate with no tools
- Key lock for security
- Includes integrated tabs for securing enclosure mount to permanent building structure
- Shallow back box (1.5") allows installation into the tightest ceiling clearances



BENEFITS

- Easy to Install
- No ceiling tile grid modification necessary (if mounting into a 2'x2' grid)
- Service the AP without removing the enclosure mount from ceiling
- Lightweight aluminum design reduces ceiling strain and load
- Simple, one person installation
- Blends seamlessly into ceiling
- No tools required for installation

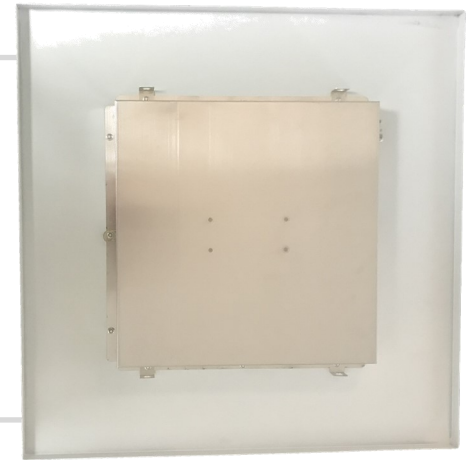

Enclosure Back



MOUNT SHIPS WITH

- 2x2 Suspended Ceiling Tile Enclosure Mount with installed Mist 2 Door
- Cord Grip
- Key




Integrated mounting tabs on two sides

Key Lock



Integrated Mounting Plate, Cord Grip and Repositionable Door

Spring Hinge

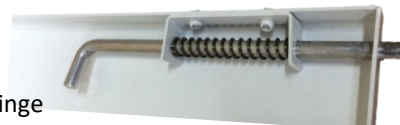

CISCO AP SUSPENDED CEILING TILE ENCLOSURE MOUNT (4800 STYLE)

Part Number: ATS-CT-CISCO4-2X2



MECHANICAL SPECIFICATIONS

Dimensions: 23.75" x 23.75" x 1.5" (603.25mm x 603.25mm x 38.1mm)

Weight (without AP): 3.75 lb (1.70 kg)

Material: Aluminum

Color: White

Lock: Key Lock

Installation: Suspended Ceiling (includes tabs for securing to building structure)

Equipment Installation: AP Mounting Feet onto Included Mounting Bracket



ENVIRONMENTAL SPECIFICATIONS

Installation Environment: Indoor



STANDARDS, TESTING AND CERTIFICATIONS

Designed to meet NEC300-22 and 300-23 to mount the Cisco AP in plenum/air handling areas



WARRANTY

2 Year Limited Warranty